



# Product data sheet

SBI130 [B] IP66:LED-12/24W/4K  
138-8994  
WE-EF

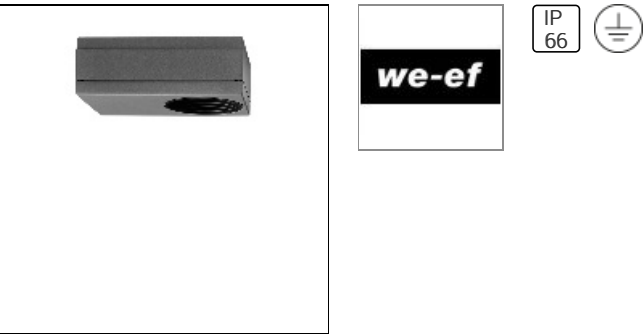

IP66, Class I. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. PMMA lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation. Integral EC electronic converter in thermally separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

## Light output 1



12 x LED			
Nominal lamp power	2 W	LOR	78%
Lamp flux	310 lm	Total flux	2895 lm
Luminous efficacy	107 lm/W	Total power	27 W
CCT	4000 K		
CRI	80		

## Mounting mode

Ceiling mounted

## Shape and measurements

Length: 9.65 in  
Width: 6.30 in  
Height: 3.15 in  
Weight: 3.4 kg

## Electric

System power: 27 W  
Appliance Class: I

## Protection

IP: 66