



# Product data sheet

PURE 1  
09.1640/POWER LED 16W/13°  
FLOS

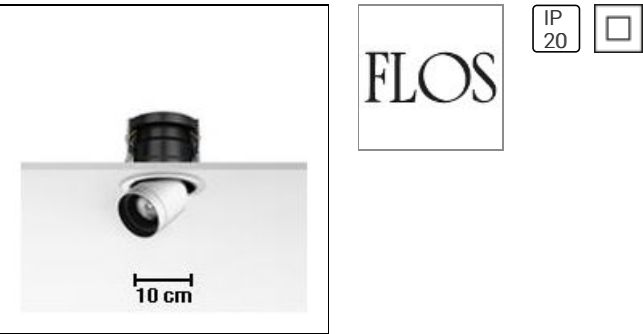

Led recessed luminaire for indoor application. Self extinguishing ceramic or engineering plastic lamp holders, with single-pole, transparent electric wires with double Teflon insulation. Aluminum body, placed above the lamp holder, black thermoplastic and 4 mm tempered glass screen-support ring. Die-cast aluminum alloy body, cover and adjustable lamp support, powder-coated white, grey or black. 220-240V, 50-60Hz power supply included.

## Light output 1



1 x LED			
Nominal lamp power	15.7 W	LOR	78%
Lamp flux	1148 lm	Total flux	896 lm
Luminous efficacy	56 lm/W	Total power	16 W
CCT	2800 K		
CRI	80		

## Mounting mode

Ceiling recessed

## Shape and measurements

Length: 3.94 in  
Width: 3.94 in  
Height: 5.51 in

## Adjustability

Rotatable, Tilttable

## Electric

System power: 16 W  
Appliance Class: II

## Protection

IP: 20