



# Product data sheet

QLS410-QT50/T4 [M/M]  
620-2510  
WE-EF

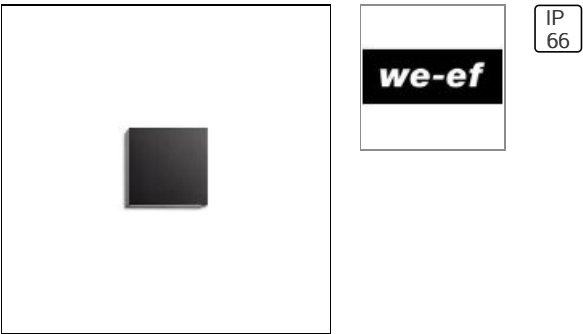

IP66. Surface mounted wall luminaire. Suitable for installation over 4" recessed junction box.

## Light output 1



1 x Halogen low voltage lamp without reflector			
Nominal lamp power	50 W	Socket	Gy6.35
Lamp flux	1250 lm	LOR	24%
Luminous efficacy	6 lm/W	ULOR	12%
CCT	3000 K	Total flux	303 lm
CRI	90	Total power	50 W

## Mounting mode

Wall mounted

## Shape and measurements

Length: 7.09 in  
Width: 7.09 in  
Height: 3.54 in

## Electric

System power: 50 W

## Protection

IP: 66