



# Product data sheet

PURE 1  
09.1621/CDM-TM/20W/35W/24°  
FLOS

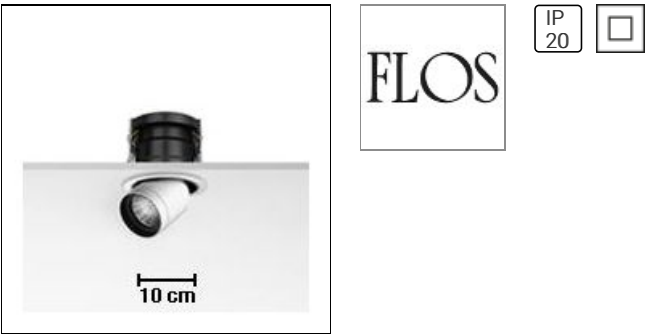


Recessed luminaire for indoor application. For very low voltage halogen lamps or standard and discharge lamps. Self-extinguishing ceramic or engineering plastic lamp holders, with single-pole, transparent electric wires with double Teflon insulation.

### Light output 1



1 x Metal halide lamp			
Nominal lamp power	35 W	Socket	Pgj5
Lamp flux	3000 lm	LOR	63%
Luminous efficacy	54 lm/W	Total flux	1898 lm
CCT	3000 K	Total power	35 W
CRI	84		



1 x Metal halide lamp			
Nominal lamp power	20 W	Socket	Pgj5
Lamp flux	1650 lm	LOR	63%
Luminous efficacy	47 lm/W	Total flux	1044 lm
CCT	3000 K	Total power	22 W
CRI	84		

### Mounting mode

Ceiling recessed

### Shape and measurements

Length: 3.94 in  
Width: 3.94 in  
Height: 5.51 in

### Adjustability

Rotatable, Tilttable

### Electric

System power: 22-35 W  
Appliance Class: II

### Protection

IP: 20