



# Product data sheet

LP CIRCLE RECESSED Ø450 WHITE LED 4000K 25W  
5742587831  
LOUIS POULSEN

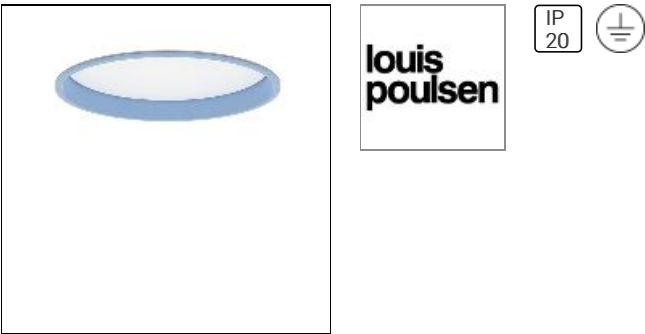

LP Circle Recessed Design: Mikkel Beedholm/KHR arkitekter Concept: The fixture emits diffuse light via a high-efficiency acrylic diffuser. The diffuser, which is encircled by a voluminous coloured or white ring, is hidden when viewed from low angles. Angling the inner side of the ring 5° creates a comfortable and decorative graduation of the light from the diffuser. With two diameters and four different installation options, the lights series can be used for a wide range of applications. Finish: White, Black, Pale Petroleum or Yellow. Powder coated. Material: Reflector: Deep drawn aluminium. Diffuser: Acrylic, frosted. Installation lock: Polyamide. Mounting: Ceiling thickness: 1–40 mm. Driver is a separate unit (supplied with luminaire). Cut-out dimensions: Ø 260: Ø 248mm, Ø 450: Ø 438mm. Looping: Approved, max 5x1.5mm<sup>2</sup>. Weight: Min: 2.2 kg Max: 5.0 kg Class: Ingress protection IP20. Electric shock protection I.

## Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	25 W	CRI	90
Total flux	2793 lm	LOR	100%
Luminous efficacy	112 lm/W	Total power	25 W

## Mounting mode

Ceiling recessed

## Shape and measurements

Length: 17.95 in

Width: 17.95 in

Height: 4.06 in

## Adjustability

Fixed

## Electric

System power: 25 W

Appliance Class: I

## Protection

IP: 20