



Product data sheet

RFS540-COS140 [M]
661-4592
WE-EF

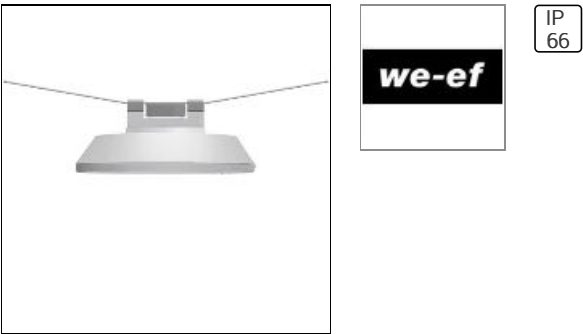

IP66. Cantenary mounted luminaire. Internal gear control on hinged, 'tool-less' removable gear tray.

Light output 1



1 x Metal halide lamp			
Nominal lamp power	140 W	Socket	Pgz12
Lamp flux	16500 lm	LOR	78%
Luminous efficacy	84 lm/W	Total flux	12905 lm
CCT	2800 K	Total power	154 W
CRI	80		

Mounting mode

Pendant

Shape and measurements

Height: 5.31 in
Diameter: 22.44 in

Electric

System power: 154 W

Protection

IP: 66