



Product data sheet

PIA230 [A60] IP66:LED-12/24W/3K
108-1666
WE-EF

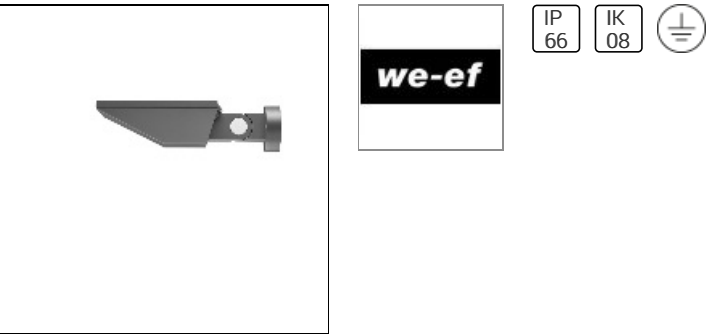

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gaskets. Safety glass, hinged. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Luminaire +/-30° tiltable.

Light output 1



12 x LED			
Nominal lamp power	2 W	LOR	75%
Lamp flux	290 lm	Total flux	2606 lm
Luminous efficacy	97 lm/W	Total power	27 W
CCT	3000 K		
CRI	80		

Mounting mode

Wall mounted

Shape and measurements

Length: 9.84 in
Width: 5.51 in
Height: 24.41 in
Weight: 8.5 kg

Electric

System power: 27 W
Appliance Class: I

Protection

IP: 66
IK: 08