



Product data sheet

ETC120-TB/E-20[M.ASC10]
185-2260
WE-EF

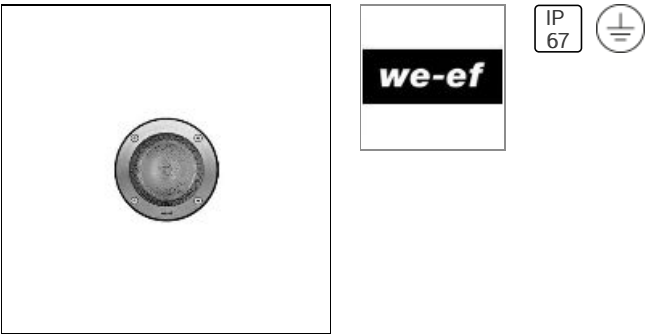

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10). Factory-sealed termination chamber complete with cable gland and 1,5 m of flexible PVC free cable. Cable gland with spiral cable bending protection. 'No tool' removable gear/reflector tray. Anodised aluminium reflector. The optional installation blackout is recommended for mounting. To be ordered seperately.

Light output 1



1 x Metal halide lamp			
Nominal lamp power	20 W	Socket	Pgj5
Lamp flux	1650 lm	LOR	54%
Luminous efficacy	40 lm/W	ULOR	54%
CCT	3000 K	Total flux	889 lm
CRI	85	Total power	22 W

Mounting mode

Floor recessed

Shape and measurements

Height: 7.68 in
Diameter: 6.30 in

Electric

System power: 22 W
Appliance Class: I

Protection

IP: 67