



Product data sheet

ETC130-GB[EE.ASC10] VA:IP67:HIT-TC-CE-35W/PGJ5
185-2657
WE-EF

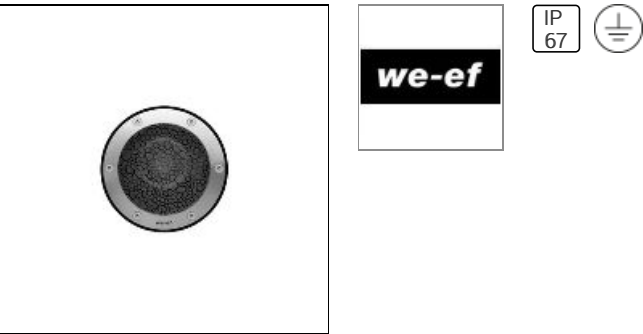

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 1,5 m of flexible PVC free cable. Cable gland with spiral cable bending protection. 'No tool' removable gear/reflector tray. Anodised aluminium reflector, gimbal mounted, 360° rotatable and 30° tilt. Integral Cool Touch Adaptor CTA® for reducing glass surface temperature. The optional installation blackout is recommended for mounting. To be ordered separately.

Light output 1



1 x Metal halide lamp			
Nominal lamp power	35 W	Socket	Pgj5
Lamp flux	3800 lm	LOR	44%
Luminous efficacy	39 lm/W	ULOR	44%
CCT	3000 K	Total flux	1677 lm
CRI	85	Total power	43 W

Mounting mode

Floor recessed

Shape and measurements

Height: 10.43 in
Diameter: 9.84 in

Electric

System power: 43 W
Appliance Class: I

Protection

IP: 67