



Product data sheet

COMPASS
03.3506/PAR 16/50W/50°
FLOS

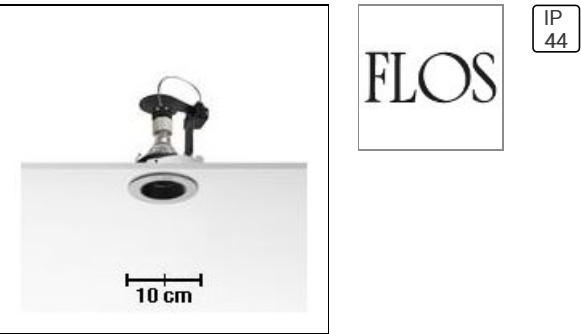

Luminaire for halogen and high-pressure discharge lamps. Recessed body in black-painted metal. Die-cast aluminium alloy, powder-coated closing ring. Die-cast aluminium lamp support with heat dissipating element. Black thermoplastic anti-glare ring, 4 mm tempered glass cover. Stainless steel fixing brackets

Light output 1



1 x Halogen low voltage lamp without reflector

Nominal lamp power	50 W	Socket	Gz10
Lamp flux	536 lm	LOR	100%
Luminous efficacy	11 lm/W	Total flux	537 lm
CCT	2900 K	Total power	50 W
CRI	99		

Mounting mode

Ceiling recessed

Shape and measurements

Height: 5.71 in
Diameter: 3.54 in

Adjustability

Fixed

Electric

System power: 50 W

Protection

IP: 44