



# Product data sheet

QR0379-LD-12/15W STAINLESS  
616-2621  
WE-EF

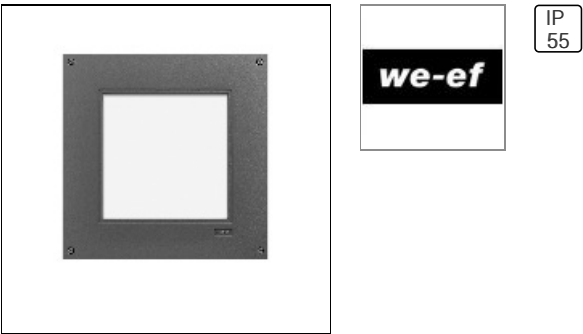

IP55. Recessed LED steplight for orientation. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout. Painted finish.

## Light output 1

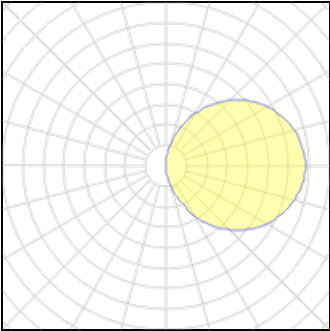

12 x LED			
Nominal lamp power	1 W	LOR	19%
Lamp flux	170 lm	ULOR	9%
Luminous efficacy	25 lm/W	Total flux	379 lm
CCT	4000 K	Total power	15 W
CRI	80		

## Mounting mode

Wall recessed

## Shape and measurements

Length: 12.68 in  
Width: 12.68 in  
Height: 6.89 in  
Weight: 9.48 kg

## Electric

System power: 15 W

## Protection

IP: 55