



Product data sheet

QLS410-CMH22/TM [M/M]
620-2540
WE-EF

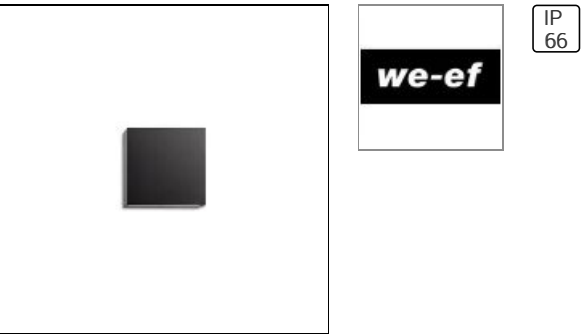

IP66. Surface mounted wall luminaire. Suitable for installation over 4" recessed junction box.

Light output 1



| | | | |
|-----------------------|---------|-------------|--------|
| 1 x Metal halide lamp | | | |
| Nominal lamp power | 20 W | Socket | Pgj5 |
| Lamp flux | 1650 lm | LOR | 29% |
| Luminous efficacy | 21 lm/W | ULOR | 14% |
| CCT | 3000 K | Total flux | 471 lm |
| CRI | 85 | Total power | 22 W |

Mounting mode

Wall mounted

Shape and measurements

Length: 7.09 in
Width: 7.09 in
Height: 3.54 in

Electric

System power: 22 W

Protection

IP: 66