



# Product data sheet

PURE 1 SPOT TRACK  
09.2400/PHOSPHOR LED 13,4W/25°  
FLOS

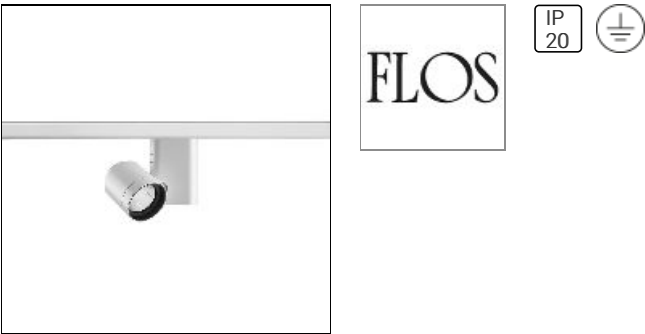

Luminaire for ceiling or three-phase electric track installation. For very low voltage halogen lamps, standard and discharge lamps or LED . Self-extinguishing ceramic or engineering plastic lamp holders, with single-pole, transparent electric wires with double Teflon insulation. Aluminum body, placed above the lamp holder, black thermoplastic and 4 mm tempered glass screen-support ring. Die-cast aluminum alloy body, cover and adjustable lamp support, powder-coated white, grey or black. Thermoplastic three-phase adapter. Finishes: white (30), grey (02), black (14).

## Light output 1



1 x LED			
Nominal lamp power	13.4 W	LOR	63%
Lamp flux	700 lm	Total flux	439 lm
Luminous efficacy	52 lm/W	Total power	13.4 W
CCT	3000 K		
CRI	95		

## Mounting mode

Ceiling mounted

## Shape and measurements

Length: 1.69 in  
Width: 4.34 in  
Height: 5.31 in

## Adjustability

Free

## Electric

System power: 13.4 W  
Appliance Class: I

## Protection

IP: 20