



Product data sheet

ETV120 IP67:2LED 60/7,5W/3K [LE]
612-2220
WE-EF

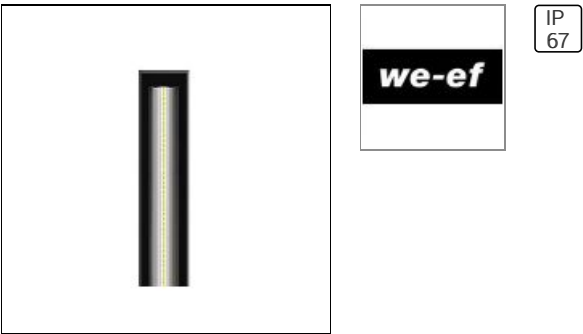

IP67. Inground uplight. Suitable for flush installation in concrete or earth. Special effects and distributions can be realized with linear lens, flood lens, 6° directional lens, 20° directional lens, or color filters.

Light output 1



| 120 x LED | | | |
|--------------------|---------|-------------|---------|
| Nominal lamp power | 0.125 W | LOR | 75% |
| Lamp flux | 19 lm | ULOR | 75% |
| Luminous efficacy | 86 lm/W | Total flux | 1720 lm |
| CCT | 3000 K | Total power | 20 W |
| CRI | 80 | | |

Mounting mode

Floor recessed

Shape and measurements

Length: 24.69 in
Width: 1.89 in
Height: 1.65 in

Electric

System power: 20 W

Protection

IP: 67