



Product data sheet

ETV140 IP67:LED 96/33W/RGBW [LB]
612-4422
WE-EF

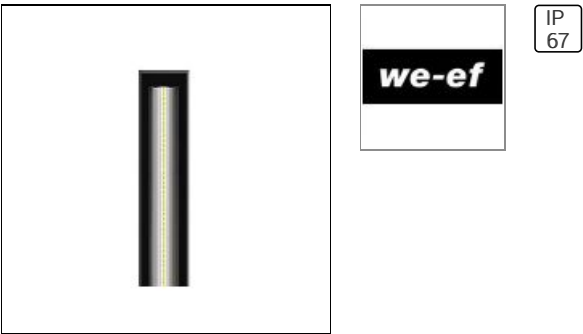

IP67. Inground uplight. Suitable for flush installation in concrete or earth. Special effects and distributions can be realized with linear lens, flood lens, 6° directional lens, 20° directional lens, or color filters.

Light output 1



128 x LED			
Nominal lamp power	2 W	LOR	71%
Lamp flux	35 lm	ULOR	71%
Luminous efficacy	64 lm/W	Total flux	3199 lm
CCT	2000 K	Total power	50 W
CRI	80		

Mounting mode

Floor recessed

Shape and measurements

Length: 48.31 in
Width: 1.89 in
Height: 1.65 in

Electric

System power: 50 W

Protection

IP: 67