



Product data sheet

LIGHT LINEAR VT 3 STREET AND AREA LUMINAIRES
VT-20002-T4-W40
LIGMAN

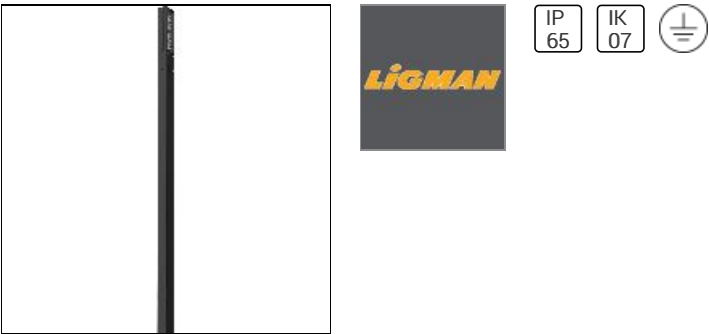

- Lamp LED - CRI Ra > 80 - MacAdam Ellipse 3 SDCM - Colour Temperature 3000K ,4000K - Die-cast aluminium housing and extruded aluminium column pre-treated before powder coating ensuring high corrosion resistance - Stainless steel fasteners in grade 316 - Durable silicone rubber gasket and clear toughened glass - Maximum wind load resistance is 120 km/h - Surge protection 10 kV

Light output 1 (integrated)



| | | | |
|--------------------|---------|-------------|--------|
| Lamp type | LED | CCT | 4032 K |
| Nominal lamp power | 80.9 W | CRI | 80 |
| Total flux | 6430 lm | LOR | 100% |
| Luminous efficacy | 79 lm/W | ULOR | 4% |
| | | Total power | 80.9 W |

Mounting mode

Pole integrated

Shape and measurements

Length: 3.54 in
Width: 5.91 in
Height: 22.44 in
Weight: 27.5 kg

Adjustability

Fixed

Design

Color of housing: Black, White, Silver gray

Glare protection

Glare protection: UGR < 19

Electric

System power: 80.9 W
Voltage: 230 V AC
Ballast: ECG
Controller: Dimmable 1..10V, DALI
Appliance Class: I

Protection

IP: 65
IK: 07
Surface temperature: 40°C