



Product data sheet

QLS410-QT50/T4 [M/M]
620-2510
WE-EF

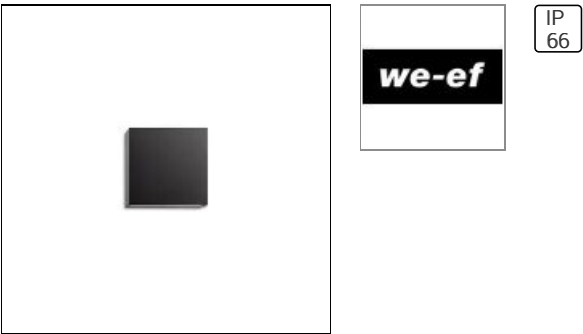

IP66. Surface mounted wall luminaire. Suitable for installation over 4" recessed junction box.

Light output 1



1 x Halogen low voltage lamp without reflector			
Nominal lamp power	50 W	Socket	Gy6.35
Lamp flux	1250 lm	LOR	24%
Luminous efficacy	6 lm/W	ULOR	12%
CCT	3000 K	Total flux	303 lm
CRI	90	Total power	50 W

Mounting mode

Wall mounted

Shape and measurements

Length: 7.09 in
Width: 7.09 in
Height: 3.54 in

Electric

System power: 50 W

Protection

IP: 66