



Product data sheet

STL259 IP55:LED-6/6W/3K
133-0308
WE-EF

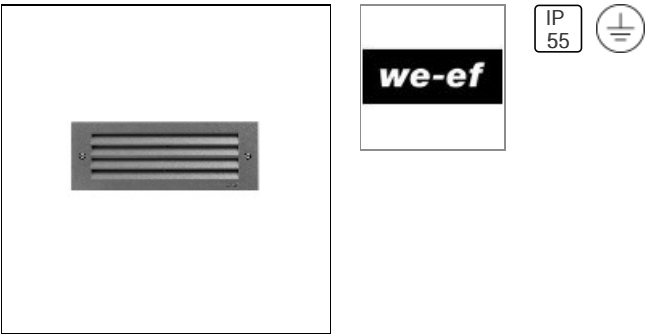

IP55, Class I. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

Light output 1



6 x LED			
Nominal lamp power	1 W	LOR	3%
Lamp flux	155 lm	Total flux	26 lm
Luminous efficacy	3 lm/W	Total power	7.5 W
CCT	3000 K		
CRI	80		

Mounting mode

Wall recessed

Shape and measurements

Length: 9.84 in
Width: 3.62 in
Height: 4.25 in
Weight: 1.3 kg

Electric

System power: 7.5 W
Appliance Class: I

Protection

IP: 55