



Product data sheet

PURE 1
09.1641/POWER LED 16W/21°
FLOS

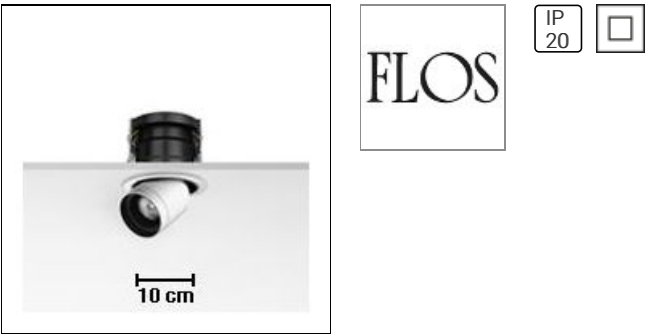

Led recessed luminaire for indoor application. Self extinguishing ceramic or engineering plastic lamp holders, with single-pole, transparent electric wires with double Teflon insulation. Aluminum body, placed above the lamp holder, black thermoplastic and 4 mm tempered glass screen-support ring. Die-cast aluminum alloy body, cover and adjustable lamp support, powder-coated white, grey or black. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

Light output 1



1 x LED			
Nominal lamp power	15.7 W	LOR	66%
Lamp flux	1148 lm	Total flux	762 lm
Luminous efficacy	48 lm/W	Total power	16 W
CCT	2800 K		
CRI	80		

Mounting mode

Ceiling recessed

Shape and measurements

Length: 3.94 in
Width: 3.94 in
Height: 5.51 in

Adjustability

Rotatable, Tilttable

Electric

System power: 16 W
Appliance Class: II

Protection

IP: 20