



# Product data sheet

VFL530 [P65] IP66:LED-12/12W/4K  
108-1553  
WE-EF

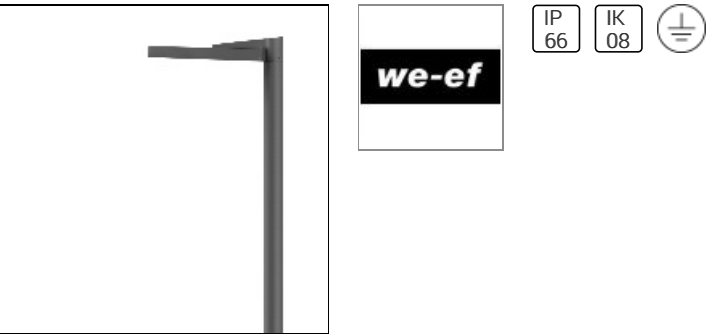

IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RFC® Reflection Free Contour main lens. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation. Recommended mounting height 3.0-6.0 m, depending on lamp type selected.

## Light output 1



12 x LED			
Nominal lamp power	1 W	LOR	92%
Lamp flux	170 lm	Total flux	1874 lm
Luminous efficacy	135 lm/W	Total power	13.9 W
CCT	4000 K		
CRI	80		

## Mounting mode

Pole integrated

## Shape and measurements

Length: 18.50 in  
Width: 12.99 in  
Height: 4.49 in  
Weight: 6.4 kg

## Electric

System power: 13.9 W  
Appliance Class: I

## Protection

IP: 66  
IK: 08