



Product data sheet

COMPASS
03.3529/CDM-TC/20W/48°
FLOS

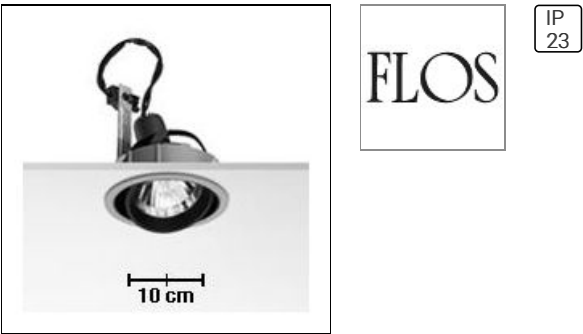

Luminaire for halogen and high-pressure discharge lamps. Injection-moulded aluminium reflector body with powder-coated finish. Lamp support with die-cast aluminium, black powder-coated heat dissipating element. Thermoplastic recessed ring and screening ring, die-cast aluminium, black powder-coated anti-glare ring. 4 mm. tempered glass cover. Stainless steel fixing brackets.

Light output 1



1 x Metal halide lamp			
Nominal lamp power	20 W	Socket	G8D.5
Lamp flux	1700 lm	LOR	79%
Luminous efficacy	61 lm/W	Total flux	1346 lm
CCT	3000 K	Total power	22 W
CRI	83		

Mounting mode

Ceiling recessed

Shape and measurements

Height: 8.66 in
Diameter: 6.38 in

Adjustability

Tiltable

Electric

System power: 22 W

Protection

IP: 23