



Product data sheet

ETC130-GB [B] VA:IP67:LED-12/18W/3K
185-2658
WE-EF

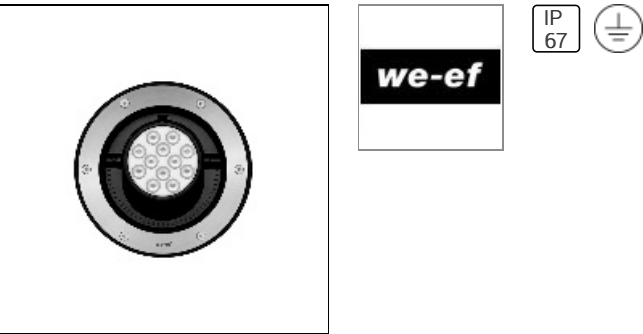

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 1.5 m of flexible PVC free cable. Cable gland with spiral cable bending protection. Integral EC electronic converter in thermally separated compartment. 'No tool' removable gear/lens tray. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Gimbal mounted, 360° rotatable and 30° tiltable. The optional installation blackout is recommended for mounting. To be ordered separately. Optional with Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10) available on request.

Light output 1



12 x LED			
Nominal lamp power	1.5 W	LOR	76%
Lamp flux	215 lm	ULOR	76%
Luminous efficacy	93 lm/W	Total flux	1950 lm
CCT	3000 K	Total power	21 W
CRI	80		

Mounting mode

Floor recessed

Shape and measurements

Height: 10.43 in
Diameter: 9.84 in
Weight: 6.2 kg

Electric

System power: 21 W
Appliance Class: I

Information regarding emergency functions

Supplementary emergency lighting
Emergency sign: N/A

Protection

IP: 67