



Product data sheet

ETV140 [LB] IP67:LED-128/44W/RGBW
186-0268
WE-EF

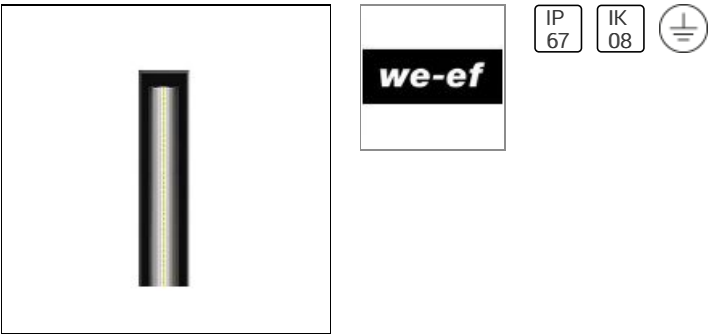

IP67, Class I. IK08. Marine-grade all aluminium construction. Anodized aluminium extrusion. PCS hardware. Silicone rubber gasket. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible cable. Linear PMMA LED lens. Factory installed LED circuit board. LED boards can be easily removed for upgrading. Luminaire is factory sealed and does not need to be opened during installation. The optional installation blockout is recommended for mounting. To be ordered separately. Electronic converter with DALI or DMX (RGBW) interface.

Light output 1



128 x LED			
Nominal lamp power	2 W	LOR	71%
Lamp flux	35 lm	ULOR	71%
Luminous efficacy	64 lm/W	Total flux	3199 lm
CCT	2000 K	Total power	50 W
CRI	80		

Mounting mode

Floor recessed

Shape and measurements

Length: 48.31 in
Width: 1.89 in
Height: 1.65 in

Electric

System power: 50 W
Appliance Class: I

Protection

IP: 67
IK: 08